



TAVA TP-400

Type	Compact 2 way full range line array element
Frequency response	60Hz - 20KHz+/-3dB, -10dB@40Hz
Drivers	1 x 8" (double voice coil) LF neodymium woofer 2 x 1.75" HF neodymium compression driver
Rated power(RMS)	400Wrms
Recommended AMP	600 - 1000W into 8 ohms
Sensitivity(1W/1M)	99dB
Maximum SPL	126dB continuous, 132dB peak
Nominal impedance	8Ω
Dispersion(-6dB)	90° horizontal, 10° vertical
Finish	Polyurea Paint
Protective grille	With black perforated steel
Connectors	2 x Neutrik speakon NL4
Dimensions	(W)370 x (H)260 x (D)290mm
Weight	11.5KG

Technical Specifications

Description

The TAVA TP-400 is a 2-way full range line array element combining 1 x 8"(double voice coil) neodymium LF woofer and 2x1.75" neodymium compression driver into a very compact enclosure offering class leading efficiency and performance. The TP-400 has 90° nominal horizontal dispersion and 10° nominal vertical; very light weighted 11.5KG per box; Perfect for small occasions, TAVA system offers stage-of-art sound quality. We recommend their use with TAVA TP-400L, TAVA TP-400LDP, P181 or P181-SP bass enclosures.

Features

Very compact and light weight	2 way full range with a sophisticated x-over built inside
Extremely high power-to-size ratio	Exceptional fidelity and transient response for intelligibility and high impact

Applications

Smaller churches


Wedding events

Any small indoor and outdoor occasion Auditorium

FREQUENCY

File: C:\MLS\QC\TP-400B.FRQ 4-30-2021 3:40 PM (equalized)


Sensitivity Mag - dB SPL/watt (8.0 ohms, @2.00 M) (0.10 oct)

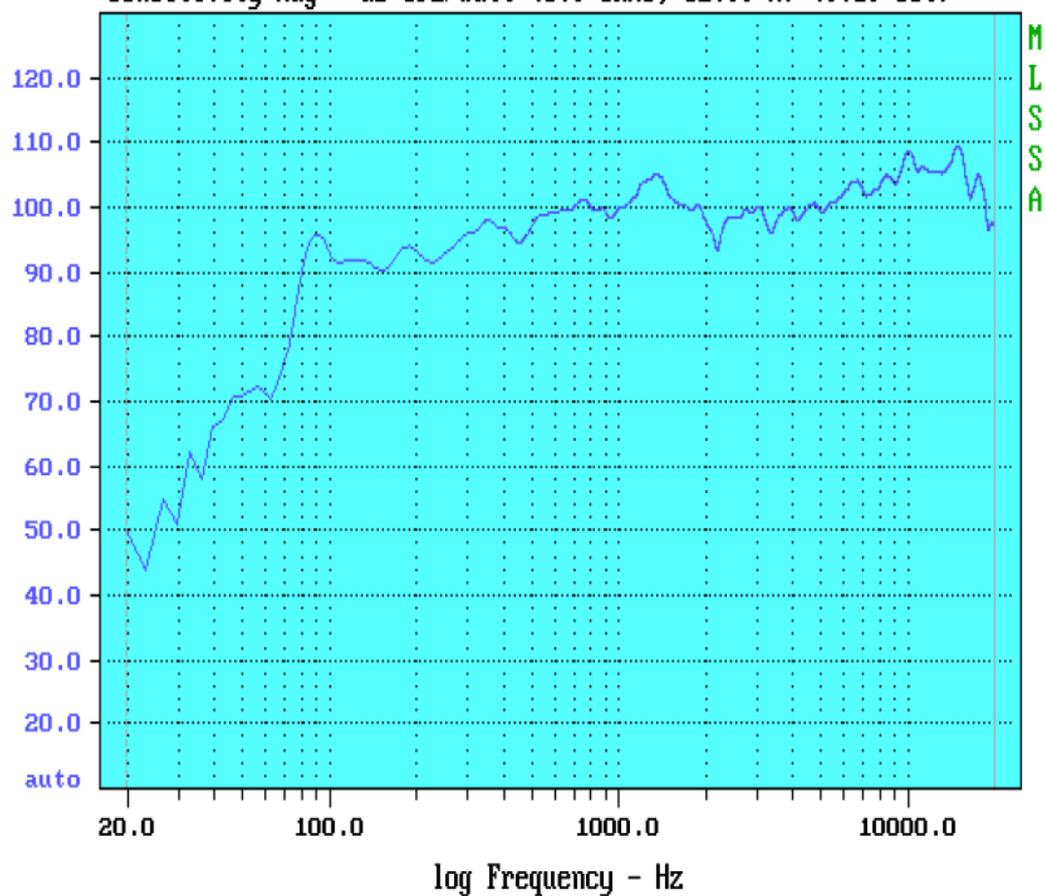

IMPEDANCE

File: C:\MLS\QC\TP-400BI.FRQ 4-30-2021 3:40 PM (equalized)

Impedance Mag - ohms (0.10 oct)

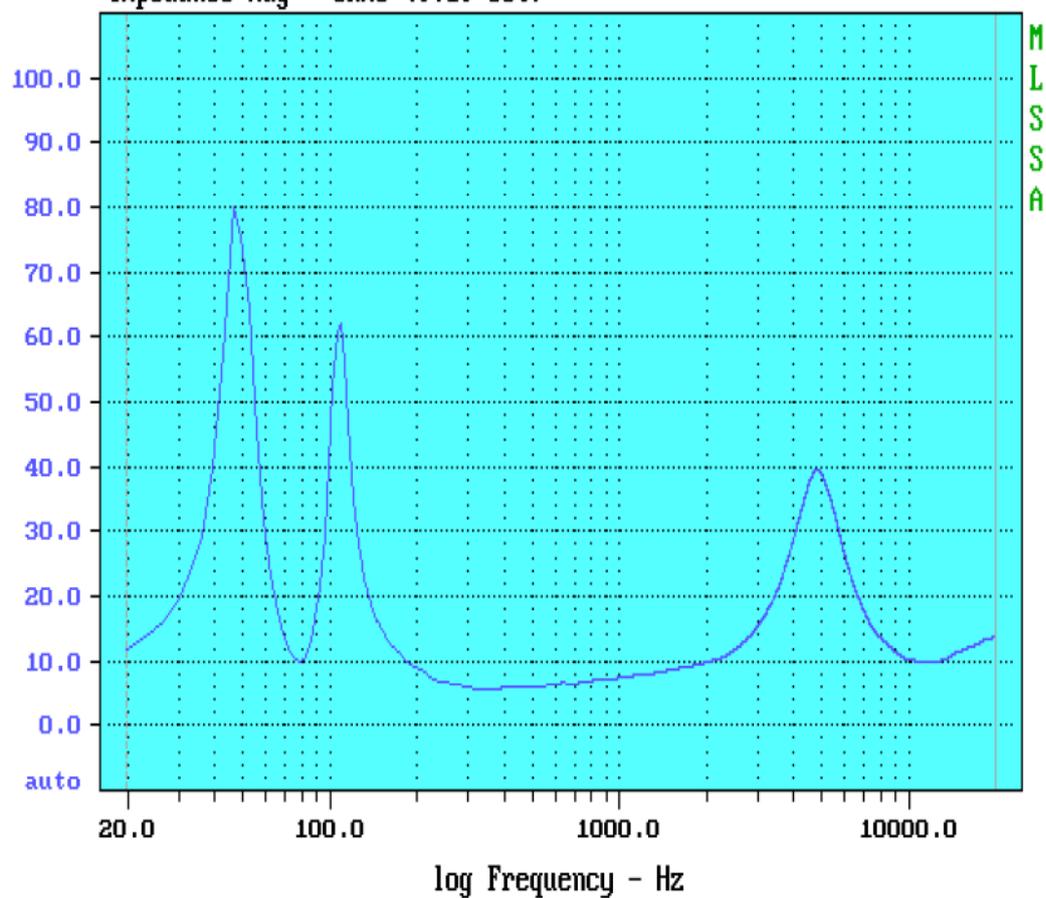



TAVA TP-400L

Type	Compact, bass reflex sub bass system
Frequency response	40Hz - 150Hz+/-3dB, -10dB@35Hz
Drivers	1 x 18" (460mm) LF woofer
Rated power(RMS)	700Wrms
Recommended AMP	900 - 1400W into 8 ohms
Sensitivity(1W/1M)	99dB
Maximum SPL	129dB continuous, 135dB peak
Nominal impedance	8Ω
Finish	Polyurea Paint
Protective grille	With black perforated steel
Connectors	2 x Neutrik speakon NL4
Dimensions	(W)500 x (H)700 x (D)700mm
Weight	46KG

Technical Specifications

TAVA TP-400LDP

Type	Compact, bass reflex sub bass system
Frequency response	40Hz - 150Hz+/-3dB, -10dB@35Hz
Drivers	1 x 18" (460mm) LF woofer
Amp module	Class D inc SMPS and Networked DSP
Power Output	600+600+1200W@8ohm(1KHz, 0.01@ THD)
Input Panel	2xCombo Input, 2xRCA Input, Mono/Stereo Switch, Mic/Line Switch, USD Port, LCD
Output	Powercon, Switch
DSP	2xInput, 3xOutput, 48Hz sampling, Phase, 6xPEQ per input/output, Q value, delay 370ms, crossover limiter
Power REQ	110 - 250 V @ 50/60Hz
Finish	Polyurea Paint
Protective grille	With black perforated steel
Dimensions	(W)500 x (H)700 x (D)700mm
Weight	52KG

Technical Specifications

TAURIA
TAURIA TP



TAURIA
TAURIA TP

